




## 凯澄电动葫芦系列 Kito Electric Hoist Series

### HJ型电动葫芦 Electric Hoist Model HJ

HJ型电动葫芦属于一般用途钢丝绳式电动葫芦，它拥有多种起重量、起升高度及起升和运行单、双速功能。其中HJ低建筑高度型电动葫芦特别适合于建筑高度较低的厂房内安装使用。

The electric hoist model HJ is one of the type of general purpose electric wire rope hoist. It has manifold lifting capacities, lifting heights and the single/ double speed functions of lifting and traversing. One of them the electric hoist model HJ with low height headroom is especially designed for the workshops with low height headroom.

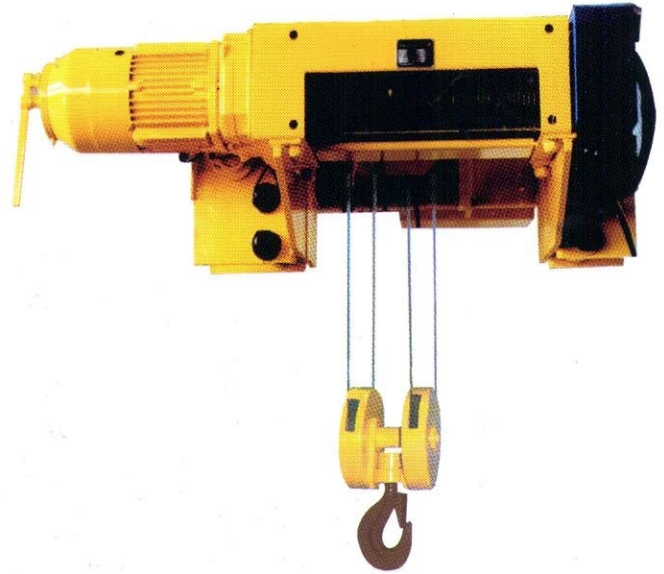

### HJ型低建筑用电动葫芦 Model HJ Electric Hoists For The Low Building

HJ型低建筑用电动葫芦具有结构紧凑、有效起升高等特点，特别适用于建筑高度较低的厂房内。根据用户的不同要求可提供带双制动、超速限制、超载限制和具有手动释放功能的电动葫芦。

The electric hoists for the low building have the features of compact structure, higher hoisting height, especially are suitable for the low building, for example, factory, workshop, and storehouse. And the electric hoists can supply following function with a second brake, exceed speed limit, overload limit and manual release according to customer's requirement.

#### 基本技术参数 Basic Technical Data

型号 Type		HJ2		HJ4		HJ5			HJ6		
倍率 Number of falls		1/2	1/4	1/2	1/4	1/2	1/4	1/6	1/2	1/4	1/6
起重量 Lifting capacity(t)		1	2	3.2	6.3	5	10	16	10	20	32
起升高度 Lifting height(m)		6,3,8,10,12.5,16,20									
起升速度 Lifting speed(m/min)		10/1.6	5/0.8	8/1.3	4/0.65	8/1.3	4/0.65	2.7/0.45	6/1	3.0/0.5	3/0.3
运行速度 Traversing speed(m/min)		20					20/5			16/4	
电源 Power supply(V.hz)		380; 50									
钢丝绳 Wire rope		8NAT6x37+NF1670ZS		12NAT6x37+NF1670ZS		15NAT6x37+NF1670ZS			20NAT18x7+FC1770		
轨道工字钢型号 I-beam		16-28b		20a-45c	28a-63c	28a-63c			28a-63c		
电动机 Motor	起升 Lifting	功率 Power(kw)	2/0.33	5/0.83		7.8/1.3			12/2	19/2	
		转速 Speed(r/min)	2800/440	2800/460		2800/460			2800/460	1400/138	
	普通型运行 Traversing	功率 Power(kw)	0.2	0.4	0.8	0.88/0.21			1.45/0.32		
		转速 Speed(r/min)	1380	1380		2800/700			2800/700		
低建筑高度型运行 Low headroom Traversing	功率 Power(kw)	0.4	0.8	0.8	1.45	1.45/0.32			1.45/0.32x2		
	转速 Speed(r/min)	1380	1380	1380		2800/700			2800/700		