


HC-C/HM-C型船用电动葫芦

Marine Electric Hoists Model HC-C/HM-C

HC-C/HM-C型船用电动葫芦是起升单/双速型船用钢丝绳式电动葫芦，是经中国船级社检定认可的具有"三防"性能的船用电动葫芦。

The marine electric hoist model HC-C/HM-C is the marine electric wire rope hoist with single/double speed of lifting, as the triple-proof hoists approved by the China Classification Society.

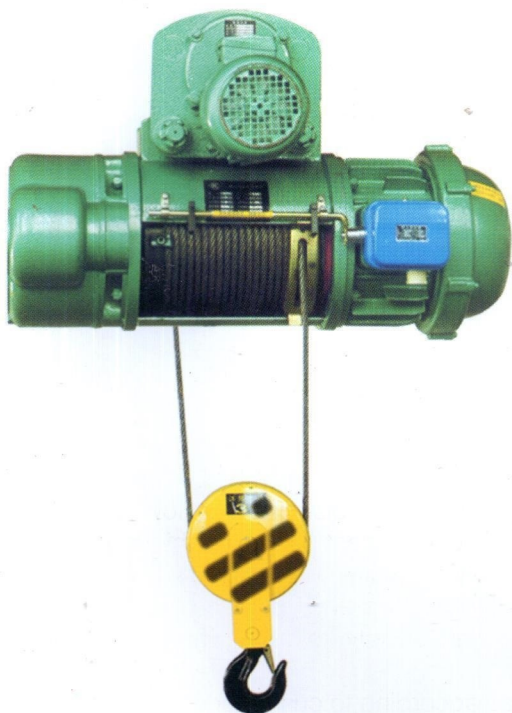

基本技术参数 Basic Technical Data

起重量 Lifting capacity(t)		0.5	1	2	3	5	8	10	12.5	16	20
起升高度 Lifting height(m)		6, 9, 12, 18		6, 9, 12, 18, 24			6, 9, 12, 18, 24, 30		6, 9, 12, 18, 24		
起升速度 Lifting speed(m/min)				8, 8/0.8			5, 5/0.5	7, 7/0.7	5, 5/0.5	3.5, 3.5/0.35	
运行速度 Traversing speed(m/min)				20/30			20	20/30	20	20	
电源 Power supply(V;Hz)				380; 50				380; 50		380; 50	
接合次数 Number of switching(n/hr)							120				
钢丝绳 Wire rope		5.1ZBB6x37 +NF1670ZS	7.4ZBB6x37 +NF1670ZS	11ZBB6x37 +NF1670ZS	13ZBB6x37 +NF1670ZS	15ZBB6x37 +NF1770ZS	13ZBB6x37 +NF1770	15ZBB6x37 +NF1770ZS	16ZBB6x37 +FU910	18ZBB6x29 Fi+Fc1870	
轨道工字钢型号 I-beam		16-28b		20a-32c	20a-45c	28a-63c			36a-63c		
电动机 Motor	主起升 Main hoisting	功率 Power(kw)	0.8	1.5	3.0	4.5	7.5			13	
		转速 Speed(r/min)	1380	1380	1380	1380	1380			930	
	副起升 Auxiliary hoisting	功率 Power(kw)	0.2		0.4	0.8	0.8			1.5	
		转速 Speed(r/min)	1380		1380	1380	1380			930	
运行 Traversing	功率 Power(kw)	0.2		0.4		0.8	0.5x2		0.8x2		
	转速 Speed(r/min)	1380		1380		1380			1380		